

Customer Process Change Notification Form PCN-2011-429

Part Information

Cirrus Logic Part # / Quantity

CS4340-CZZRCS5340-CZZR CS5341-CZZRCS5342-CZZR
 CS4341-CZZRCS5340-DZZR CS5341-DZZRCS5341-CZZR

PCN Effective Date: Lot Effective Date:

Cirrus P/N Change: Yes No (Contact the sales representative for availability of samples if applicable)

If yes, provide new part number:

Package Mark Change: Yes No

If Yes, briefly explain:

[Any Fab, Assembly, or Design changes results in pack mark changes, please provide detail]

- Reason for Change:**
- Design/New Rev
 - Fab Process
 - Assembly Site
 - Additional Assembly Source
 - Fab Site
 - Assembly Process
 - Other (Specify)
 - Additional Fab Source

Carrier Tape and Qty per Reel

- Description of Change:**
- Fix Errata
 - Yield Enhancement
 - Fix Known Bug
 - Performance Improvement
 - Other (specify)

| 16 TSSOP | ANST Current | ANST New |
|----------|--------------|----------|
| Vendor | Avantek | Kostat |
| Qty/Reel | 2K | 4K |

Quality and Reliability Impact:

Qualification Data Required? Yes No

Data Sheet Change Required? Yes No

If Yes, briefly explain:

| |
|--|
| |
| |

Software Change Required? Yes No

If Yes, briefly explain:

| |
|--|
| |
| |

Customer Acknowledgement and Agreement

Acknowledged and Agreed as of the Date written below:

Customer Company Name: _____

Customer Contact Name: _____
Title: _____


Signature: _____

Date:

Customer Agreed Customer Reject Not Applicable


Customer Comments:

| |
|--|
| |
|--|

| | | | |
|---|---|-------------------------|-----------|
|  | Title: CUSTOMER PROCESS CHANGE NOTIFICATION FORM | | |
| | Digitally Signed By: | Doc No: 4-QUAL-00017 | Rev: D |

Qualification Plan


1.TSSOP16

| Process | Check item | Sample Size | SPEC |
|------------|------------|--|-------------|
| Appearance | Width(mm) | 15.96 | 16.00±0.30 |
| | A0 (mm) | 6.76 | 6.8±0.10 |
| | B0 (mm) | 5.39 | 5.4±0.10 |
| | K0 (mm) | 1.60 | 1.6±0.10 |
| | Material | POLYSTYRENE | POLYSTYRENE |
| | Drawing |  TSSOP16(KOSTAT) | |


Qualification Data (Reliability data if necessary)

Fit analysis report


1. C/TAPE(nor) / PKG'(nor)

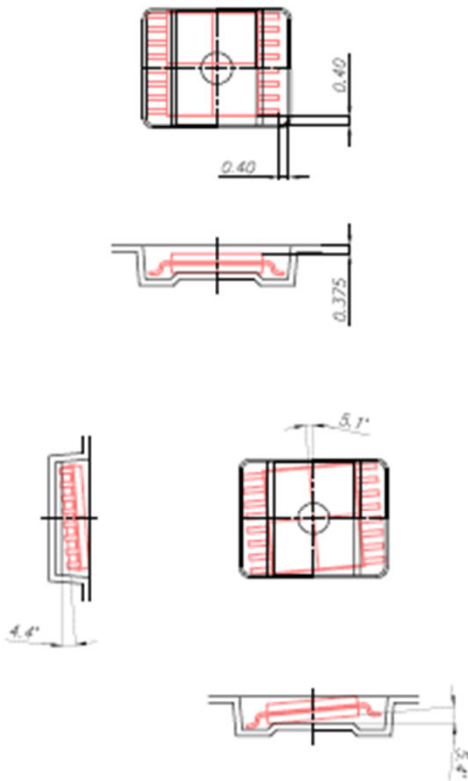

2. C/TAPE(min) / PKG'(max)

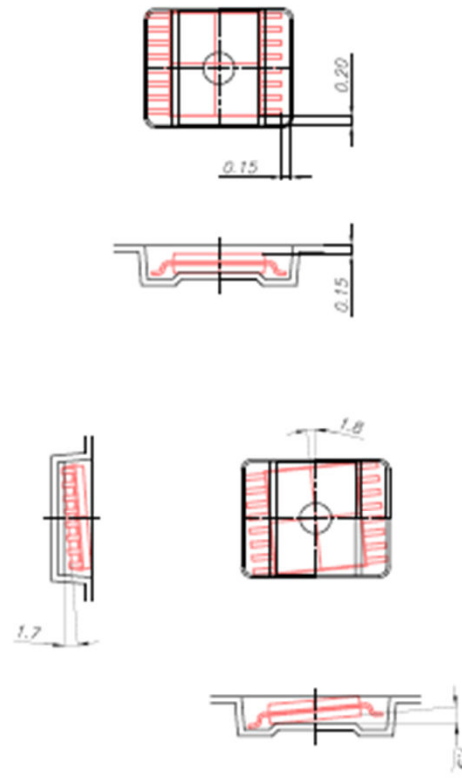

3. C/TAPE(max) / PKG'(min)

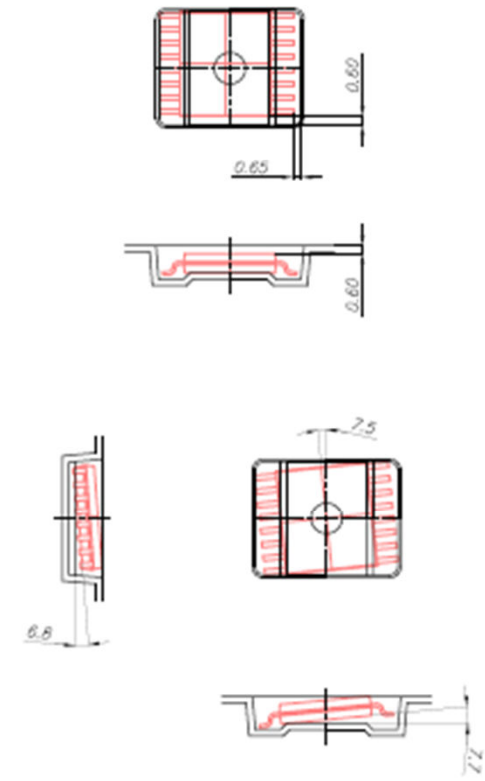

Qualification Data (Reliability data if necessary)

Material drawing comparison

| | Current | Propose |
|---------|--|--|
| Ao | 6.8 ± 0.10 | 6.8 ± 0.10 |
| Bo | 5.40 ± 0.10 | 5.40 ± 0.10 |
| Ko | 1.60 ± 0.10 | 1.60 ± 0.10 |
| W | 16.00 ± 0.30 | 16.00 ± 0.30 |
| Po | 4.00 ± 0.10 | 4.00 ± 0.10 |
| P1 | 8.00 ± 0.10 | 8.00 ± 0.10 |
| P2 | 2.00 ± 0.10 | 2.00 ± 0.10 |
| E | 1.75 ± 0.10 | 1.75 ± 0.10 |
| F | 7.50 ± 0.10 | 7.50 ± 0.10 |
| Do | $\Phi 1.5$ | $\Phi 1.5$ |
| D1 | $\Phi 1.5$ | $\Phi 1.5$ |
| T | 0.3 ± 0.05 | 0.3 ± 0.05 |
| Drawing |  old |  new |

Qualification Data (Reliability data if necessary)

QA Data

Vendor's OQA data:



Kostat

ANST'S IQA data:



ANST

Qualification Data (Reliability data if necessary)

Peel test report

1. Standard:

1.1 Split test: 20g-50g


1.2 Full test: 30g-80g

2. Testing

Sealing time: 30MS

3. Peel test in different temperature.

| Temp | Max | Min | Ave | Lo | Hi |
|--------|-----|-----|------|----|----|
| 150° C | 63 | 46 | 54.5 | 30 | 80 |
| 155° C | 64 | 48 | 56 | 30 | 80 |
| 160° C | 70 | 49 | 59.5 | 30 | 80 |

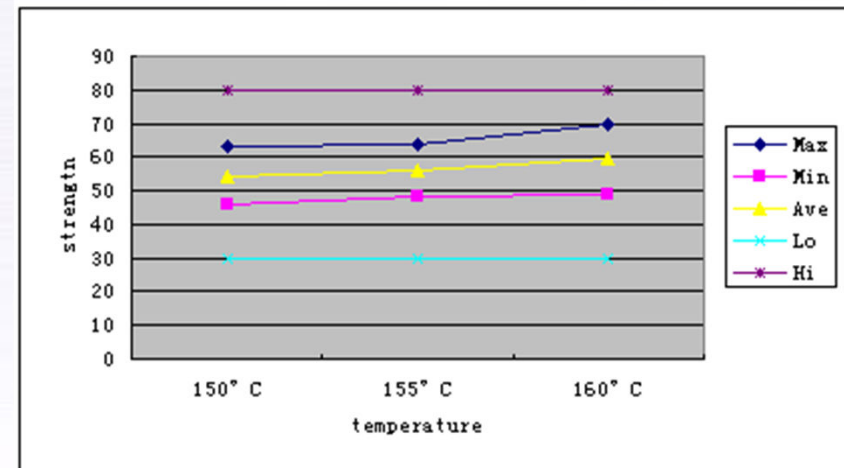

Qualification Data (Reliability data if necessary)

Drop test

1. Specimen:

| | | | |
|----------------|--------------------------------|--------------|------------|
| Package Code | | Package Size | TSSOP/16LD |
| Lead Count | 16 lead | Reel vendor | Advantek |
| Material Code | 3202035373 | Sample Size | 4K/reel |
| Packing method | Follow Cirrus's packing method | | |

Qualification Data (Reliability data if necessary)

Drop test


2. Test Specification

| Sequence | The Parts of the container for free fall drop | Trial |
|-----------------------|--|-----------|
| 1 | The basic corner | 1 |
| 2 | The shortest edge radiating from the container | 1 |
| 3 | The next longest edge radiating from the container | 1 |
| 4 | The longest edge radiating from the container | 1 |
| 5~10 | All six surfaces of the container | 6 |
| Total Trials | | 10 |
| Free Fall Drop Height | | 1.0 meter |

Summary: Zero defect found before and after drop test.

Qualification Plan

Cover Tape

| Check item | | Proposed Cover tape (Denka) | Current Cover tape (Advantek) |
|------------|------------------------------------|---|----------------------------------|
| Appearance | Length (m) | 480 | 300 |
| | Width (mm) | 13.3±0.1 | 13.3±0.1 |
| | Antistatic polyester film (inch) | 0.0007874 | 0.0010 |
| | Antistatic adhesive coating (inch) | 0.00137795 | 0.00111 |
| | Transparency | OK (Haze:50%) | OK (Haze. 51%) |
| | Color | Milky white | Natural, non-pigmented |
| | IQA Report |  IOA report | N/A |

Qualification Data (Reliability data if necessary)

SGS Report



Carrier tape SGS
Report



Cover tape SGS
Report



Carrier tape
MSDS Report



cover tape MSDS
Report

Conclusion




Conclusion:

1. The new material pass the peel test .
2. The new material pass the IQA dimension test.
- 3.The new material pass the drop test.
- 4.The new vendor's carrier tape and cover tape can meet the request.

DRAWING REVISION HISTORY



| REV. NO. | REASON FOR REV. | DATE | Prepared |
|----------|-----------------|------------|----------|
| AA | New Release | 2011.03.11 | Zhucy |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------|------------|---|--------|------|-------------|------|--|--|----|------------------|----|--|--|--|----------------|--|--|--|--|-----------------|--|--|--|--|--|-------|--|--|--|--|--------|
| ORIGINATOR | NAME | DEPARTMENT | <p>Anst 安盛科技</p> <p><small>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE: DECIMALS ANGLES XX 0.2 5° XX X 0.1</small></p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| REVIEWER | Zhucy | T-PE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| APPROVER | Lif | T-PE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| APPROVER | Luzf | QS/QC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| APPROVER | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">PROJECTION</td> <td style="width: 15%;">SCALE</td> <td style="width: 15%;">SIZE</td> <td style="width: 15%;">DRAWING NO.</td> <td style="width: 15%;">REV.</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;">A4</td> <td>S-TST-PED-0T-069</td> <td style="text-align: center;">AA</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td>Material Code.</td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td>Reference Code.</td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td style="text-align: center;">SHEET</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td style="text-align: center;">1 OF 2</td> </tr> </table> | | | PROJECTION | SCALE | SIZE | DRAWING NO. | REV. | | | A4 | S-TST-PED-0T-069 | AA | | | | Material Code. | | | | | Reference Code. | | | | | | SHEET | | | | | 1 OF 2 |
| PROJECTION | SCALE | SIZE | DRAWING NO. | REV. | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | A4 | S-TST-PED-0T-069 | AA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | Material Code. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | Reference Code. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | SHEET | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 1 OF 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

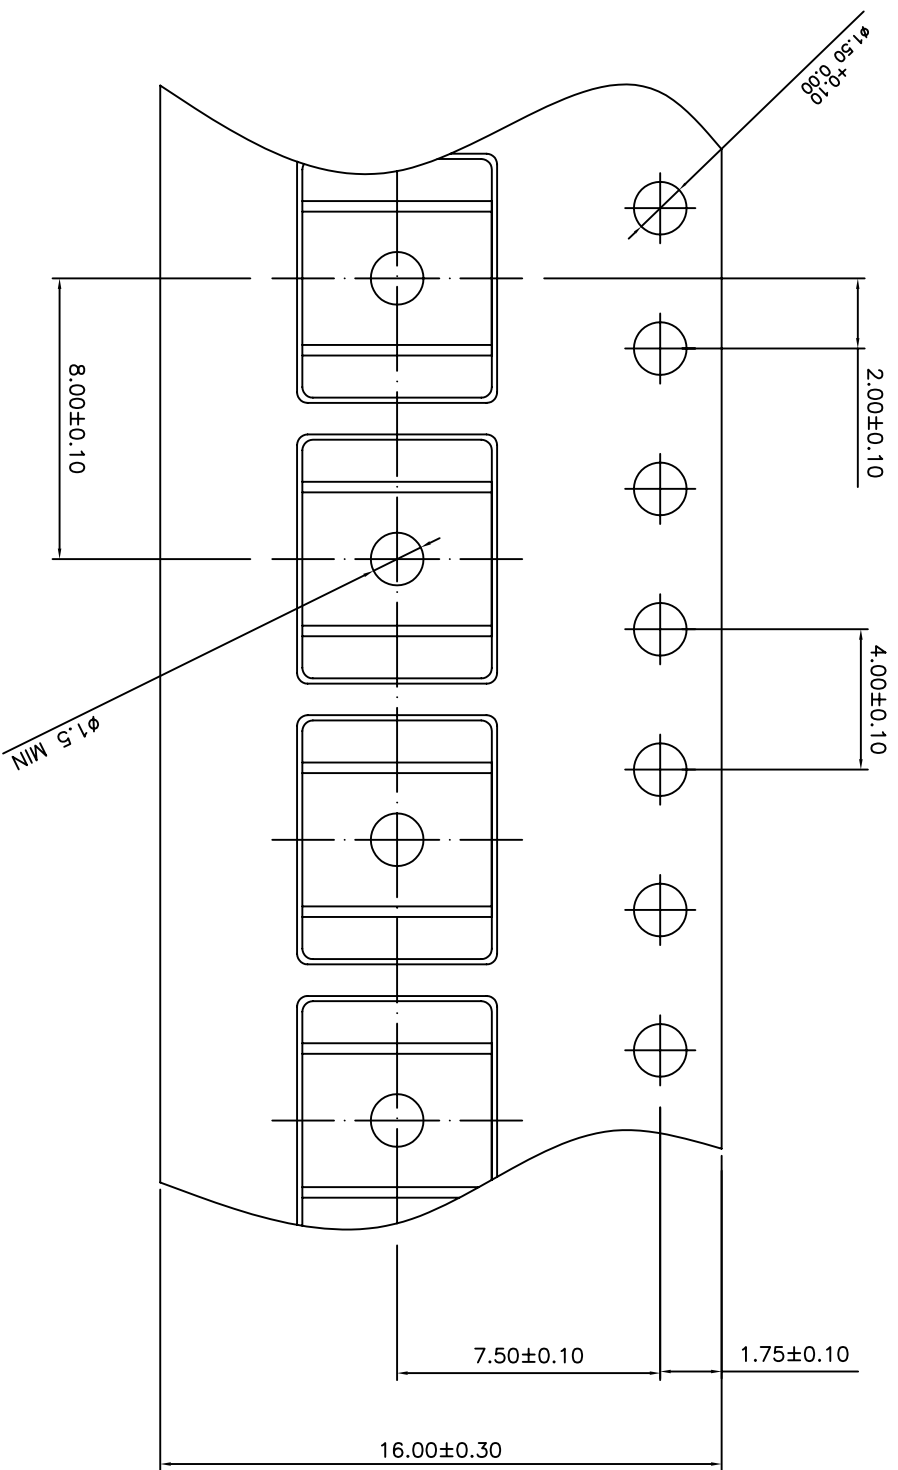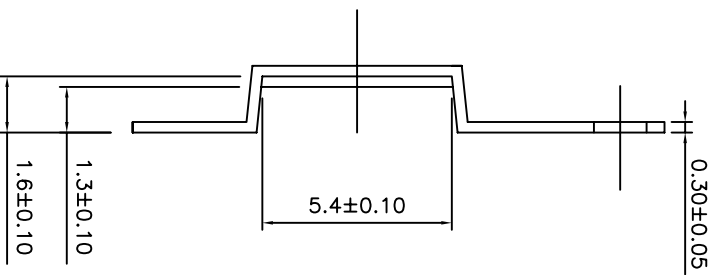

- NOTES:
1. 10 sprocket hole pitch caummulative tolerance ± 0.2 .
 2. Camber not to exceed 1mm in 100mm
 3. Ao and Bo measured on a plane 0.5mm above the bottom of the pocket
 4. Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier
 5. Pocket position relative to sprocket hole measured as true position of pocket not pocket hole.
 6. Pocket center and pocket hole center must be same position.

| | | | |
|---|--------|------------------|------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE: | | TITLE | |
| DECIMALS | ANGLES | DRAWING NO. | |
| X.X X ±0.13 | ±1° | S-TST-PEO-07-069 | |
| X.X X ±0.10 | | Material Code. | 3202035373 |
| | | Reference Code. | |
| PROJECTION | SCALE | SIZE | SHEET |
| 1st Angle | 1:1 | A4 | 2 OF 2 |
| | | REV. AA | |
| 安盛科技 | | PS (Kostrat) | |

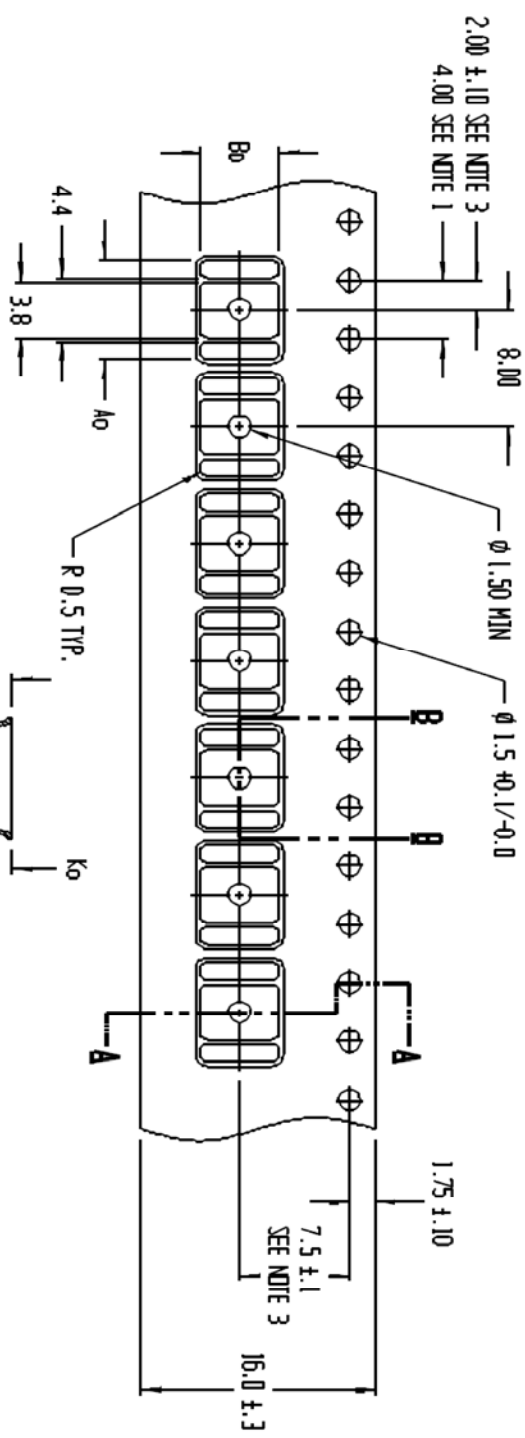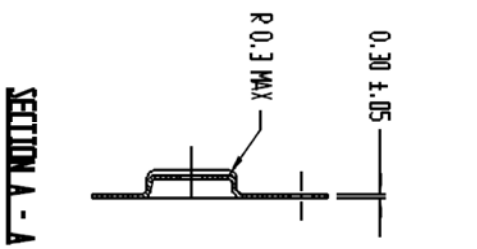

$A_0 = 6.80$
 $B_0 = 5.40$
 $K_0 = 1.60$
 $K_1 = 1.30$

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 2. CAMBER IN COMPLIANCE WITH EIA 481
 3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE






| | | | |
|---|--------|-------------------------------|------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS | | TITLE | |
| TOLERANCES ARE: | | 载带 16mm 6.8mm * 5.4mm 273m PS | |
| DEIMALS | ANGLES | DRAWING NO. | |
| XX X ±0.1 | ±1° | S-1ST-PED-01-020 | |
| XX X ±0.05 | | Material Code: | 3202035170 |
| XX XX ±0.050 | | Reference Code: | R071-0210A |
| PROJECTION | SCALE | SIZE | SHEET |
| 1st Angle | 1:1 | A4 | 2 OF 2 |

DRAWING REVISION HISTORY

| REV. NO. | REASON FOR REV. | DATE | Prepared |
|----------|-----------------|------------|----------|
| AA | New Release | 2011.03.11 | Zhucy |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | | | | | | | | | | | | | | | | | | | | | |
|--|-----------|------------|---|-------|------|-------------|------|--|--|----|------------------|----|-----------------|-----------|--|-------|--|--|--|--|--------|--|
| ORIGINATOR | NAME | DEPARTMENT | <p>Anst 安盛科技</p> <p style="font-size: small;">UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE: DECIMALS ANGLES XX 40.2 45° XX X 40.1</p> | | | | | | | | | | | | | | | | | | | |
| REVIEWER | Zhucy | T-PE | | | | | | | | | | | | | | | | | | | | |
| APPROVER | Lif | T-PE | | | | | | | | | | | | | | | | | | | | |
| APPROVER | Luzf | QS/QC | | | | | | | | | | | | | | | | | | | | |
| APPROVER | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">PROJECTION</td> <td style="width: 10%;">SCALE</td> <td style="width: 10%;">SIZE</td> <td style="width: 10%;">DRAWING NO.</td> <td style="width: 10%;">REV.</td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;">A4</td> <td>S-TST-PED-0T-069</td> <td style="text-align: center;">AA</td> </tr> <tr> <td>Reference Code.</td> <td colspan="2">320203373</td> <td colspan="2">SHEET</td> </tr> <tr> <td> </td> <td colspan="2"> </td> <td colspan="2" style="text-align: center;">1 OF 2</td> </tr> </table> | | | PROJECTION | SCALE | SIZE | DRAWING NO. | REV. | | | A4 | S-TST-PED-0T-069 | AA | Reference Code. | 320203373 | | SHEET | | | | | 1 OF 2 | |
| PROJECTION | SCALE | SIZE | DRAWING NO. | REV. | | | | | | | | | | | | | | | | | | |
| | | A4 | S-TST-PED-0T-069 | AA | | | | | | | | | | | | | | | | | | |
| Reference Code. | 320203373 | | SHEET | | | | | | | | | | | | | | | | | | | |
| | | | 1 OF 2 | | | | | | | | | | | | | | | | | | | |

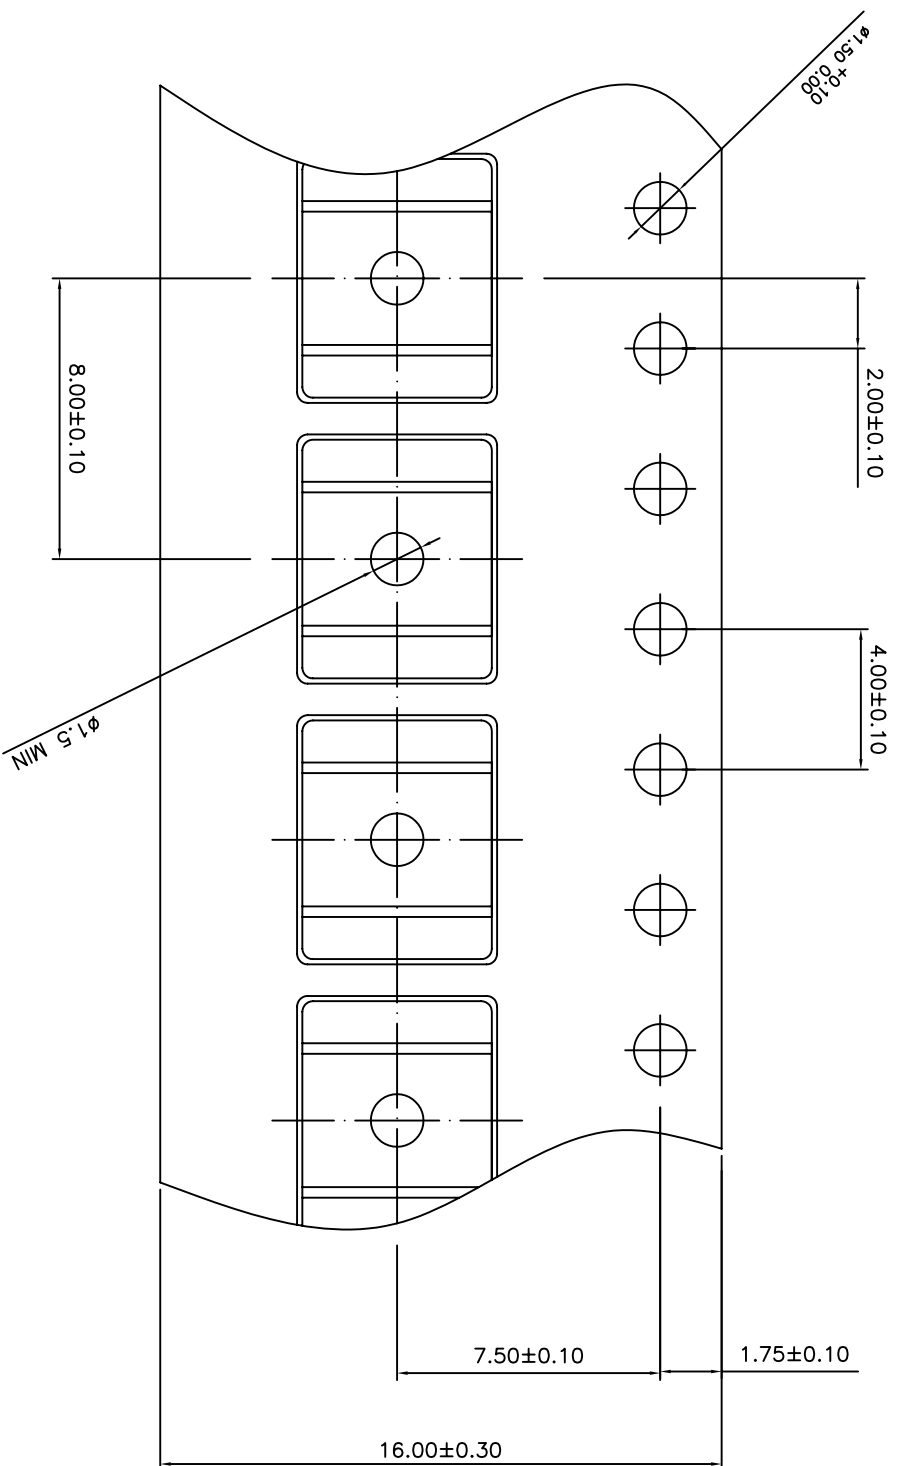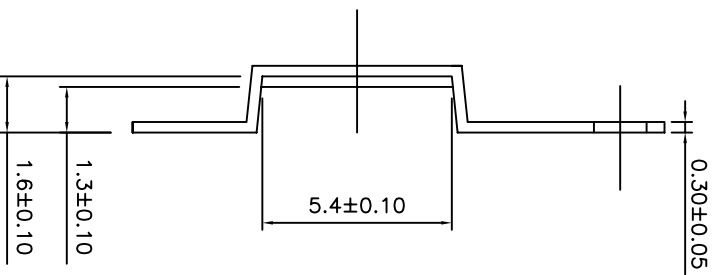

- NOTES:
1. 10 sprocket hole pitch caummulative tolerance ± 0.2 .
 2. Camber not to exceed 1mm in 100mm
 3. Ao and Bo measured on a plane 0.5mm above the bottom of the pocket
 4. Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier
 5. Pocket position relative to sprocket hole measured as true position of pocket not pocket hole.
 6. Pocket center and pocket hole center must be same position.

| | | | |
|---|--------|------------------|------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE: | | TITLE | |
| DECIMALS | ANGLES | DRAWING NO. | |
| X.X X ±0.13 | ±1° | S-TST-PEO-07-069 | |
| X.X X ±0.10 | | Material Code. | 3202035373 |
| | | Reference Code. | |
| PROJECTION | SCALE | SIZE | SHEET |
| 1st Angle | 1:1 | A4 | 2 OF 2 |
| | | REV. AA | |
| 安盛科技 | | PS (Kostar) | |

CARRIER TAPE OUTGOING INSPECTION REPORT

PART NO. :
 CUSTOMER PART NO. :
 DRAWING CODE NO. :
 MATERIAL :
 P.O NO. :
 INVOICE :

TSSOP 16LD
 N/A
 KS-1608-152
 POLYSTYRENE
 N/A
 N/A

CUSTOMER :
 REVISION NO. :
 DATE INSP. :
 QTY. INSP. :
 TOTAL QUANTITY :
 LOT NO. :

COMIRACLE
 #00
 2010.12.03
 11 PIECES
 1 Rolls
 SAMPLE



1. DIMENSIONAL MEASUREMENT :

| ITEM | DIMENSION | LSL | USL | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | MEAN | STDEV | CPK | P/F |
|-------|--|-------|-------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|-------|------|
| AO | POCKET LENGTH IN AO DIRECTION | 6.70 | 6.90 | 6.733 | 6.738 | 6.737 | 6.738 | 6.744 | 6.744 | 6.744 | 6.744 | 6.742 | 6.739 | 6.743 | 6.740 | 0.004 | 3.615 | PASS |
| BO | POCKET LENGTH IN BO DIRECTION | 5.30 | 5.50 | 5.348 | 5.357 | 5.357 | 5.350 | 5.350 | 5.354 | 5.357 | 5.350 | 5.354 | 5.348 | 5.350 | 5.352 | 0.004 | 4.671 | PASS |
| E | CENTER OF SPROCKET HOLE TO TAPE EDGE | 1.65 | 1.85 | 1.787 | 1.795 | 1.785 | 1.781 | 1.780 | 1.776 | 1.780 | 1.773 | 1.779 | 1.783 | 1.789 | 1.783 | 0.006 | 3.632 | PASS |
| PO | CENTER TO CENTER OF SPROCKET HOLES | 3.90 | 4.10 | 3.997 | 4.015 | 4.018 | 4.000 | 4.014 | 4.003 | 4.009 | 3.996 | 4.009 | 4.007 | 4.005 | 4.007 | 0.007 | 4.293 | PASS |
| KO | POCKET DEPTH | 1.50 | 1.70 | 1.638 | 1.627 | 1.638 | 1.638 | 1.628 | 1.628 | 1.621 | 1.625 | 1.633 | 1.632 | 1.627 | 1.630 | 0.006 | 3.997 | PASS |
| F | CENTER OF CAVITY HOLES TO (SIDEWAYS) | 7.40 | 7.60 | 7.505 | 7.511 | 7.502 | 7.518 | 7.514 | 7.519 | 7.508 | 7.503 | 7.516 | 7.512 | 7.515 | 7.511 | 0.006 | 4.865 | PASS |
| | CENTER OF ROUND SPROCKET HOLES | | | | | | | | | | | | | | | | | |
| D0 | SPROCKET HOLE | 1.50 | 1.60 | 1.587 | 1.576 | 1.587 | 1.577 | 1.577 | 1.575 | 1.580 | 1.576 | 1.580 | 1.577 | 1.578 | 1.579 | 0.004 | 1.642 | PASS |
| D1 | CENTER HOLES | | | MIN 1.5 | 1.615 | 1.611 | 1.619 | 1.611 | 1.609 | 1.604 | 1.610 | 1.608 | 1.610 | 1.611 | 1.611 | 0.004 | 7.015 | PASS |
| P2 | CENTER OF CAVITY HOLES TO (LENGTHWISE) | 1.90 | 2.10 | 1.998 | 2.007 | 1.998 | 2.005 | 1.997 | 1.987 | 2.001 | 2.003 | 1.988 | 2.018 | 2.011 | 2.001 | 0.009 | 3.524 | PASS |
| | CENTER OF ROUND SPROCKET HOLES | | | | | | | | | | | | | | | | | |
| P1 | CENTER TO CENTER OF CAVITY HOLES | 7.90 | 8.10 | 7.999 | 8.004 | 7.997 | 7.996 | 8.006 | 8.018 | 8.006 | 8.006 | 7.998 | 8.006 | 7.997 | 8.003 | 0.007 | 4.909 | PASS |
| T | TAPE THICKNESS (IS APPLICABLE AS MEASURED AT THE EDGE OF TAPE) | 0.25 | 0.35 | 0.317 | 0.298 | 0.297 | 0.288 | 0.287 | 0.318 | 0.307 | 0.287 | 0.308 | 0.305 | 0.304 | 0.302 | 0.010 | 1.557 | PASS |
| W | TAPE WIDTH | 15.70 | 16.30 | 15.960 | 15.958 | 15.957 | 15.935 | 15.918 | 15.930 | 15.908 | 15.895 | 15.915 | 15.924 | 15.926 | 15.930 | 0.021 | 3.573 | PASS |
| 10XPO | 10 SPROCKET PITCH CUMULATIVE VALUE | 39.80 | 40.20 | 39.978 | 40.009 | 39.985 | 40.026 | 40.001 | 40.000 | 40.029 | 39.983 | 39.991 | 40.025 | 39.972 | 40.000 | 0.020 | 3.296 | PASS |

2.0 VISUAL :

| DEVECTS | DEFECTS | RESULTS |
|----------------|---------|---------|
| POCKET DEFECTS | 0 | ACCEPT |
| CONTAMINATION | 0 | ACCEPT |
| SCRATCH | 0 | ACCEPT |
| PIMPLE | < 4/M | ACCEPT |
| BURRS | 0 | ACCEPT |
| OTHERS | 0 | ACCEPT |

3.0 SURFACE RESISTIVITY : 1.0E+04 TO 1.0E+11 OHMS/SQ

4.0 CAMBER : <1MM/100MM, NON-CUMULATIVE OVER 250MM

| DIMENSIONAL MEASUREMENT : | | | | | | P/F |
|---------------------------|------|------|------|------|--|------|
| 1 | 2 | 3 | 4 | 5 | | |
| 0.55 | 0.35 | 0.65 | 0.35 | 0.55 | | PASS |


5.0 FINAL RESULTS: A/R ACCEPT

NOTE :

- 1.0 ALL DIMENSIONS ARE PER EIA-481 AND ARE DISPLAYED IN MILLIMETERS.
- 2.0 T DIMENSION IS MEASURED BY DIGITAL CALIPER, KO IS MEASURED BY DIGITAL HEIGHT GAUGE, OTHERS ARE MEASURED BY PROFILE PROJECTOR

INSPECTED BY : LIFYANG DATE : 2010.12.03 APPROVED BY : K.S. CHOI DATE : 2010.12.03

POSITROL LOG

| Production Line: ALL | | Process: IQA | | Document No.: S-TCM-IQA-PL-01 | | Revision: AE | |
|--|-------------|---|------------------------|---|--|--------------|--|
| Title: <u>我带</u> Incoming Inspection Report | | Frequency: 1X/Shipment | | Revise Date: 08.10.30 | | | |
| Receive Date: 2010.12.10 | | Supplier Name: 上海芯瑞 | | Eng'r Approval: 黄雅 | | | |
| Inspection Date: 2010.12.10 | | IQA No.: CT-DK-10-12-017-12 | | | | | |
| Material Code: 3202035170 | | Material Type: 我带 16mm 6.8x5.4mm | | <input checked="" type="checkbox"/> Accept <input type="checkbox"/> Reject | | | |
| 1. Verification | | | | | | | |
| Packing Condition: <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | Quantity: 1 rolls | | | | | |
| Lot No.: CJ20101201081(1) | | <input checked="" type="checkbox"/> Accept <input type="checkbox"/> Reject | | | | | |
| 2. C of C | | | | | | | |
| Material Type: TSSOP16LD | | Material Code: N/A | | Q'ty: 1 rolls | | | |
| Drawing No./Rev.: KS-1608-152 | | Mfg. Date: N/A | | Expired Date: N/A | | | |
| Lot No.: N/A | | Dimension Test Result: <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG <input type="checkbox"/> NA | | | | | |
| Visual Inspection Result: <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | Function Test Result: <input type="checkbox"/> OK <input type="checkbox"/> NG <input checked="" type="checkbox"/> NA | | <input checked="" type="checkbox"/> Accept <input type="checkbox"/> Reject | | | |
| 3. Label | | | | | | | |
| Material Type: TSSOP16LD | | Mfg. Date: N/A | | Q'ty: <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | | |
| Material Code: N/A | | Expired Date: N/A | | Lot No.: <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | | |
| Supplier Name: <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | <input checked="" type="checkbox"/> Accept <input type="checkbox"/> Reject | | | | | |
| 4. Inspection items | | | | | | | |
| S/N | Item | Sample Size: (Ac=0, Re=1) | Defect Q'ty | Defect Mode | Result | | |
| 1 | 外观 | 1 | 0 | N/A | <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | |
| 2 | 尺寸 | 1 | 0 | N/A | <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | |
| 3 | 表面电阻 | 1 | 0 | N/A | <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | |
| 4 | | | | | <input type="checkbox"/> OK <input type="checkbox"/> NG | | |
| 5 | | | | | <input type="checkbox"/> OK <input type="checkbox"/> NG | | |
| 6 | | | | | <input type="checkbox"/> OK <input type="checkbox"/> NG | | |
| <input checked="" type="checkbox"/> Accept <input type="checkbox"/> Reject <input type="checkbox"/> NA | | | | | | | |
| 5. XRF Test | | | | | | | |
| S/N | Element 元素 | Curve 曲线 | Upper Limit 上限规格 (ppm) | Content 含量 (ppm) | Result 结果 | | |
| 1 | Hg 汞 | <input checked="" type="checkbox"/> PE <input type="checkbox"/> SOLDER | ND | ND | <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | |
| 2 | Br 溴 | PE | 1000 | ND | <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG <input type="checkbox"/> NA | | |
| 3 | Cd 镉 | <input checked="" type="checkbox"/> PE <input type="checkbox"/> SOLDER | 5 | ND | <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | |
| 4 | Pb 铅 | <input checked="" type="checkbox"/> PE <input type="checkbox"/> SOLDER | 100 | 14.3 | <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | |
| 5 | Cr 铬 | <input checked="" type="checkbox"/> workCurveCr <input type="checkbox"/> SOLDER | 100 | ND | <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG | | |
| 6 | Cr+Cd+Pb+Hg | NA | 100 | 14.3 | <input checked="" type="checkbox"/> OK <input type="checkbox"/> NG <input type="checkbox"/> NA | | |
| 6. Final Result | | | | | | | |
| Final Result: <input checked="" type="checkbox"/> Accept <input type="checkbox"/> Reject | | Stamp:  | | | | | |
| Remark: | | | | | | | |



Test Report No. F690501/LF-CTSAYAA10-12126

Issued Date: April 09, 2010

Page 1 of 6

To: **KOSTAT INC**
1 Complex(102-dong/6f), Buchon Techno-park
364, Samjung-dong, Ojung-ku
Buchon-city
GYEONGGI-DO 421-809
Korea

The following merchandise was submitted and identified by the client as :

SGS File No. : AYAA10-12126
Product Name : PS Black Sheet for embossed_Punched Carrier Tape
Item No./Part No. : Carrier Tape(Black sheet)
Received Date : April 02, 2010
Test Performing Date : April 05, 2010
Test Performed : SGS Testing Korea tested the sample(s) selected by applicant with following results
Test Results : For further details, please refer to following page(s)

SGS Testing Korea Co. Ltd.

Jeff Jang / Chemical Lab Mgr

Pluto Kim
Cindy Park/ Testing Person

**Test Report No. F690501/LF-CTSAYAA10-12126**

Issued Date: April 09, 2010

Page 2 of 6

Sample No. : AYAA10-12126.001
Sample Description : PS Black Sheet for embossed_Punched Carrier Tape
Item No./Part No. : Carrier Tape(Black sheet)

Heavy Metals

| Test Items | Unit | Test Method | MDL | Results |
|-----------------------------|-------|--|-----|---------|
| Cadmium (Cd) | mg/kg | With reference to IEC 62321:2008, ICP | 0.5 | N.D. |
| Lead (Pb) | mg/kg | With reference to IEC 62321:2008, ICP | 5 | N.D. |
| Mercury (Hg) | mg/kg | With reference to IEC 62321:2008, ICP | 2 | N.D. |
| Hexavalent Chromium (Cr VI) | mg/kg | With reference to IEC 62321:2008, UV-VIS | 1 | N.D. |
| Antimony (Sb) | mg/kg | With reference to EPA 3050B(1996), US EPA 6010B(1996), ICP | 10 | N.D. |

Flame Retardants-PBBs/PBDEs

| Test Items | Unit | Test Method | MDL | Results |
|--------------------------|-------|---|-----|---------|
| Monobromobiphenyl | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Dibromobiphenyl | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Tribromobiphenyl | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Tetrabromobiphenyl | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Pentabromobiphenyl | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Hexabromobiphenyl | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Heptabromobiphenyl | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Octabromobiphenyl | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Nonabromobiphenyl | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Decabromobiphenyl | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Monobromodiphenyl ether | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Dibromodiphenyl ether | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Tribromodiphenyl ether | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Tetrabromodiphenyl ether | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Pentabromodiphenyl ether | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Hexabromodiphenyl ether | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Heptabromodiphenyl ether | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Octabromodiphenyl ether | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |
| Nonabromodiphenyl ether | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |

NOTE: (1) N.D. = Not detected.(<MDL)

(2) mg/kg = ppm

(3) MDL = Method Detection Limit

(4) - = No regulation

(5) ** = Qualitative analysis (No Unit)

(6) * = Boiling-water-extraction:

Negative = Absence of CrVI coating

Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 180 days only.

**Test Report No. F690501/LF-CTSAYAA10-12126**

Issued Date: April 09, 2010

Page 3 of 6

Sample No. : AYAA10-12126.001
Sample Description : PS Black Sheet for embossed_Punched Carrier Tape
Item No./Part No. : Carrier Tape(Black sheet)

Flame Retardants-PBBs/PBDEs

| Test Items | Unit | Test Method | MDL | Results |
|-------------------------|-------|---|-----|---------|
| Decabromodiphenyl ether | mg/kg | With reference to IEC 62321:2008, GC-MS | 5 | N.D. |

Phthalates

| Test Items | Unit | Test Method | MDL | Results |
|------------------------------------|-------|----------------------|-----|---------|
| Di-(2-ethylhexyl) phthalate (DEHP) | mg/kg | US EPA 8061A , GC/MS | 50 | N.D. |
| Benzyl butyl phthalate (BBP) | mg/kg | US EPA 8061A , GC/MS | 50 | N.D. |
| Dibutyl phthalate (DBP) | mg/kg | US EPA 8061A , GC/MS | 50 | N.D. |

Halogen Contents

| Test Items | Unit | Test Method | MDL | Results |
|--------------|-------|---------------------------------------|-----|---------|
| Bromine(Br) | mg/kg | With reference to ASTM D 7359-08 , IC | 30 | N.D. |
| Chlorine(Cl) | mg/kg | With reference to ASTM D 7359-08 , IC | 30 | N.D. |

Flame Retardants

| Test Items | Unit | Test Method | MDL | Results |
|------------------------|-------|--------------------|-----|---------|
| Hexabromocyclododecane | mg/kg | USEPA 3540C, LC/MS | 5 | N.D. |


Other(s)

| Test Items | Unit | Test Method | MDL | Results |
|--|-------|---------------------------|-----|---------|
| PFOS(Perfluorooctane Sulfonates-Acid/Metal Salt/Amide) | mg/kg | US EPA 3540C/3550C, LC/MS | 1 | N.D. |

- NOTE: (1) N.D. = Not detected.(<MDL)
(2) mg/kg = ppm
(3) MDL = Method Detection Limit
(4) - = No regulation
(5) ** = Qualitative analysis (No Unit)
(6) * = Boiling-water-extraction:
Negative = Absence of CrVI coating
Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 180 days only.


Picture of Sample as Received:

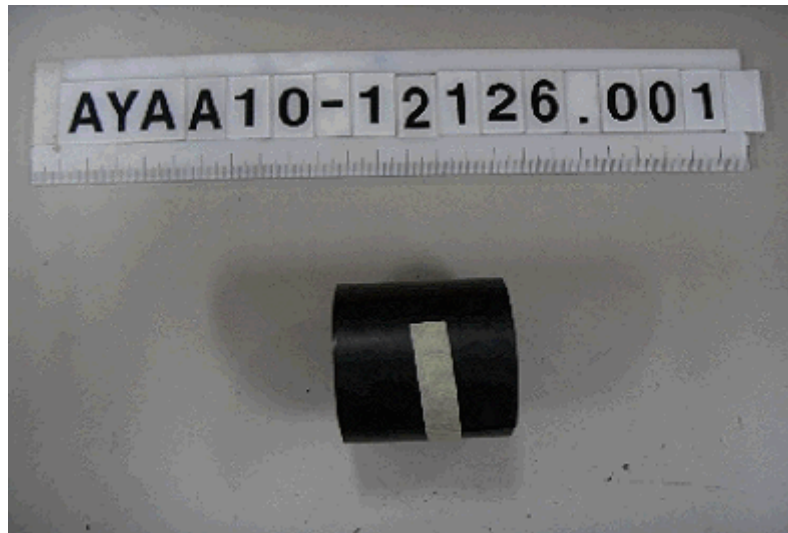

- NOTE:
- (1) N.D. = Not detected.(<MDL)
 - (2) mg/kg = ppm
 - (3) MDL = Method Detection Limit
 - (4) - = No regulation
 - (5) ** = Qualitative analysis (No Unit)
 - (6) * = Boiling-water-extraction:
 Negative = Absence of CrVI coating
 Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
 Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 180 days only.

Testing Flow Chart for RoHS: Cd/Pb/Hg/Cr⁶⁺/PBBs&PBDEs Testing

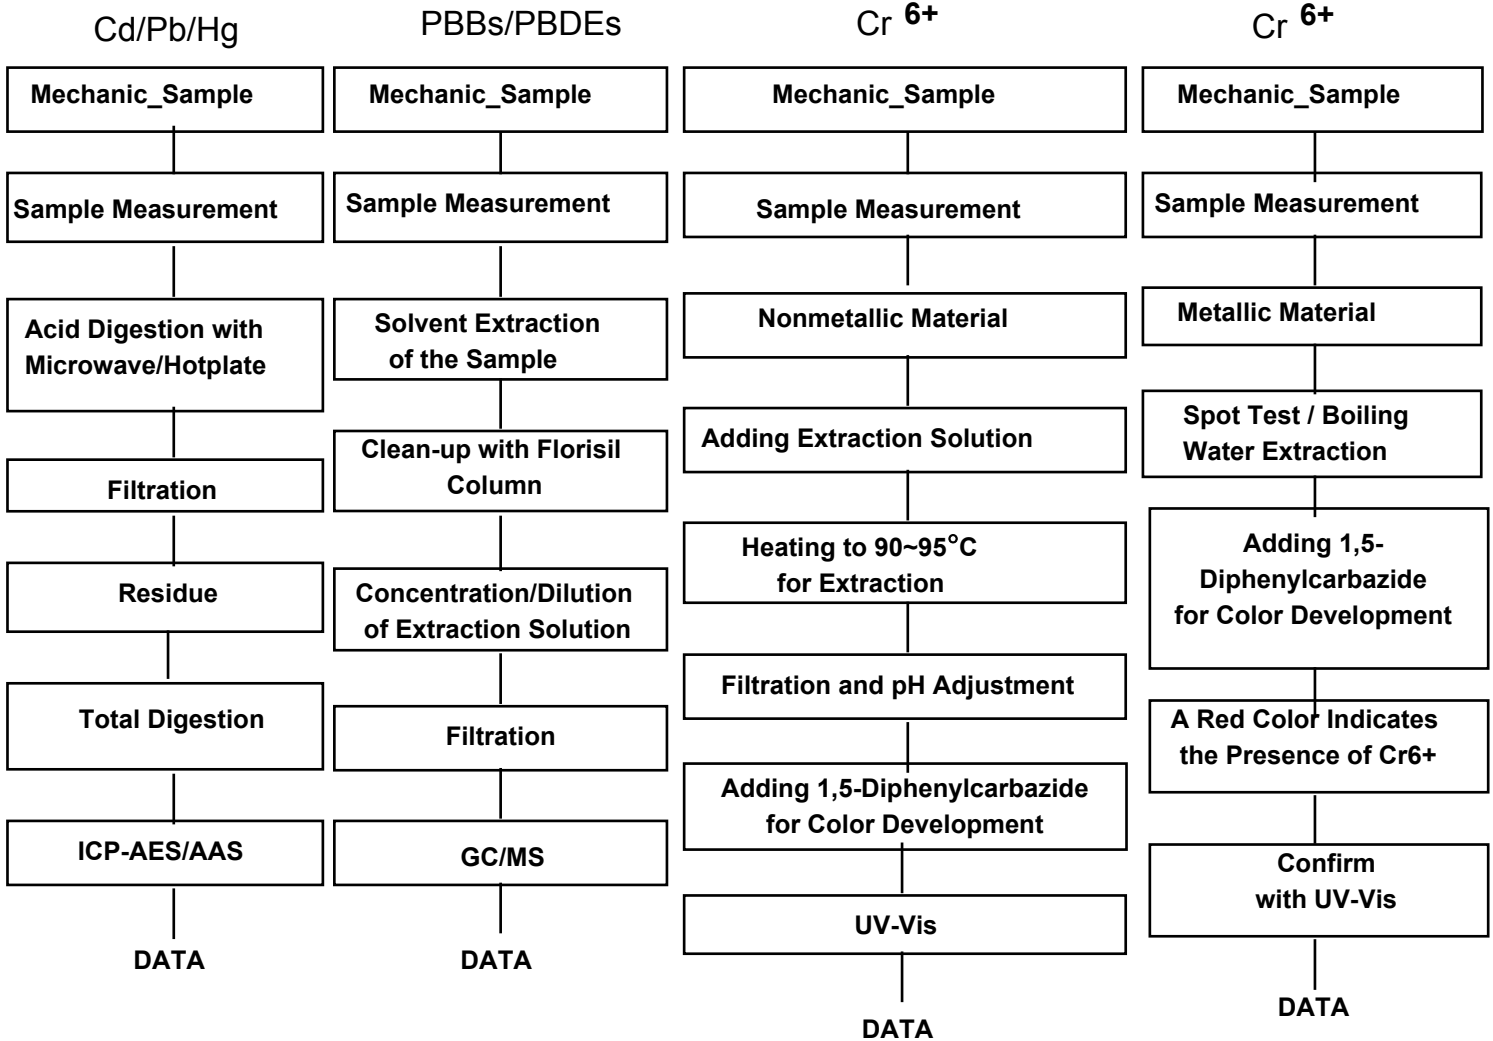

The samples were dissolved totally by pre-conditioning method according to above flow chart for Cd,Pb,Hg.

Operator Dami Yeom


Section Chief Jeff Jang

- NOTE:
- (1) N.D. = Not detected.(<MDL)
 - (2) mg/kg = ppm
 - (3) MDL = Method Detection Limit
 - (4) - = No regulation
 - (5) ** = Qualitative analysis (No Unit)
 - (6) * = Boiling-water-extraction:
 Negative = Absence of CrVI coating
 Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 180 days only.



Flow Chart for Halogen Test

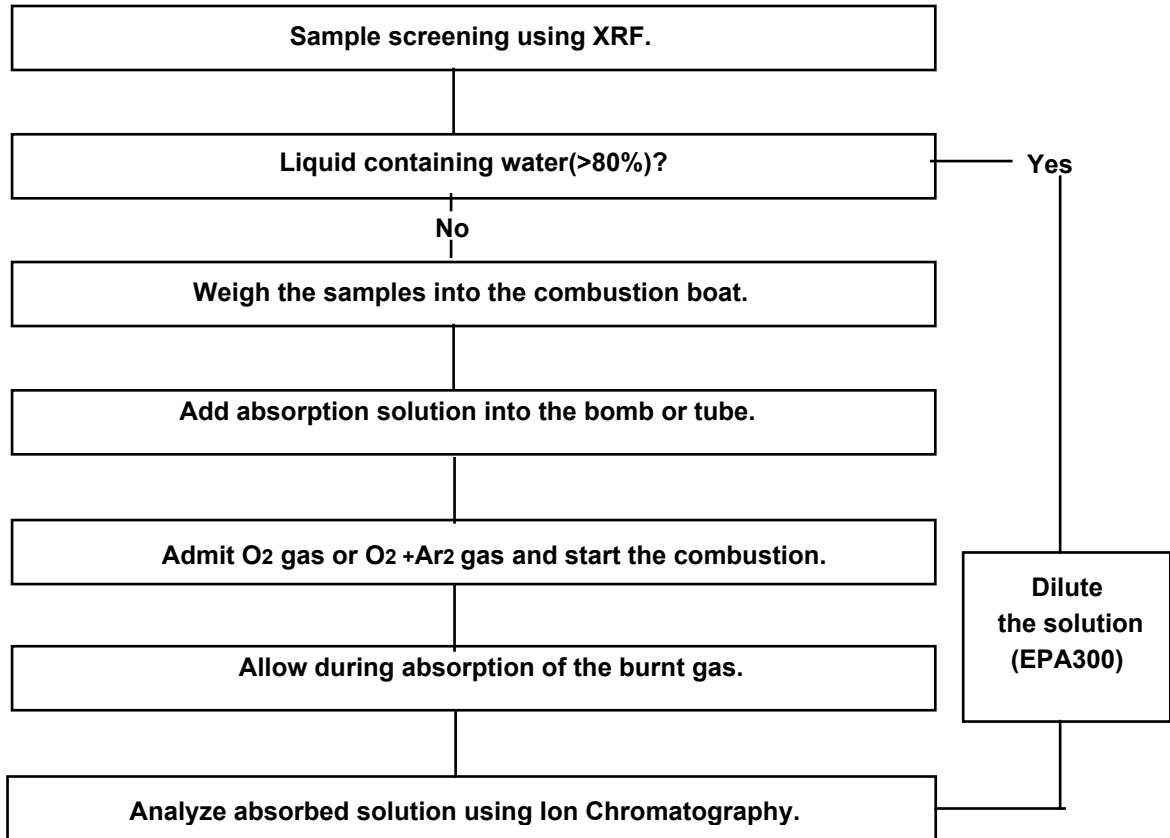

*** End ***

- NOTE:
- (1) N.D. = Not detected.(<MDL)
 - (2) mg/kg = ppm
 - (3) MDL = Method Detection Limit
 - (4) - = No regulation
 - (5) ** = Qualitative analysis (No Unit)
 - (6) * = Boiling-water-extraction:
 - Negative = Absence of CrVI coating
 - Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm² sample surface area.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 180 days only.

Test Report

No. SHAEC1007136603

Date: 31 May 2010

Page 1 of 11

DENKI KAGAKU KOGYO KABUSHIKI KAISHA

NIHONBISHI MITSUI TOWER, 1-1, NIHONBASHI-MUROMACHI 2-CHOME, CHUO-KU, TOKYO, JAPAN

The following sample(s) was/were submitted and identified on behalf of the clients as : COVER TAPE

SGS Job No. : SP10-017729 - SH
Model No. : ALS-PRA
Date of Sample Received : 26 May 2010
Testing Period : 26 May 2010 - 31 May 2010
Test Requested : Selected test(s) as requested by client.
Test Method : Please refer to next page(s).
Test Results : Please refer to next page(s).
Conclusion : Based on the performed tests on submitted samples, the results comply with the RoHS Directive 2002/95/EC and its subsequent amendments.

Signed for and on behalf of
SGS-CSTC Ltd.



Fan Jingjie, JJ
Approved Signatory

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

Test Results :

Test Part Description :

| Specimen No. | SGS Sample ID | Description |
|--------------|------------------|--------------------------|
| 1 | SHA10-071366.002 | Transparent plastic tape |

Remarks :

- (1) 1 mg/kg = 1 ppm = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (< MDL)
- (4) "-" = Not Regulated

RoHS Directive 2002/95/EC

Test Method : With reference to IEC 62321:2008

- (1) Determination of Cadmium by ICP-OES.
- (2) Determination of Lead by ICP-OES.
- (3) Determination of Mercury by ICP-OES.
- (4) Determination of Hexavalent Chromium by Colorimetric Method using UV-Vis.
- (5) Determination of PBBs / PBDEs content by GC-MS.

| Test Item(s) | Limit | Unit | MDL | 002 |
|----------------------------|-------|-------|-----|-----|
| Cadmium (Cd) | 100 | mg/kg | 2 | ND |
| Lead (Pb) | 1,000 | mg/kg | 2 | ND |
| Mercury (Hg) | 1,000 | mg/kg | 2 | ND |
| Hexavalent Chromium (CrVI) | 1,000 | mg/kg | 2 | ND |
| Sum of PBBs | 1,000 | mg/kg | - | ND |
| Monobromobiphenyl | - | mg/kg | 5 | ND |
| Dibromobiphenyl | - | mg/kg | 5 | ND |
| Tribromobiphenyl | - | mg/kg | 5 | ND |
| Tetrabromobiphenyl | - | mg/kg | 5 | ND |
| Pentabromobiphenyl | - | mg/kg | 5 | ND |
| Hexabromobiphenyl | - | mg/kg | 5 | ND |
| Heptabromobiphenyl | - | mg/kg | 5 | ND |
| Octabromobiphenyl | - | mg/kg | 5 | ND |
| Nonabromobiphenyl | - | mg/kg | 5 | ND |
| Decabromobiphenyl | - | mg/kg | 5 | ND |
| Sum of PBDEs | 1,000 | mg/kg | - | ND |
| Monobromodiphenyl ether | - | mg/kg | 5 | ND |

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not obligate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

Test Report

No. SHAEC1007136603

Date: 31 May 2010

Page 3 of 11

| <u>Test Item(s)</u> | <u>Limit</u> | <u>Unit</u> | <u>MDL</u> | <u>002</u> |
|--------------------------|--------------|-------------|------------|------------|
| Dibromodiphenyl ether | - | mg/kg | 5 | ND |
| Tribromodiphenyl ether | - | mg/kg | 5 | ND |
| Tetrabromodiphenyl ether | - | mg/kg | 5 | ND |
| Pentabromodiphenyl ether | - | mg/kg | 5 | ND |
| Hexabromodiphenyl ether | - | mg/kg | 5 | ND |
| Heptabromodiphenyl ether | - | mg/kg | 5 | ND |
| Octabromodiphenyl ether | - | mg/kg | 5 | ND |
| Nonabromodiphenyl ether | - | mg/kg | 5 | ND |
| Decabromodiphenyl ether | - | mg/kg | 5 | ND |

Notes :

- (1) The maximum permissible limit is quoted from the document 2005/618/EC amending RoHS directive 2002/95/EC

Halogen

Test Method : With reference to EN 14582: 2007, analysis was performed by Ion Chromatograph (IC).

| <u>Test Item(s)</u> | <u>Unit</u> | <u>MDL</u> | <u>002</u> |
|---------------------|-------------|------------|------------|
| Fluorine (F) | mg/kg | 50 | ND |
| Chlorine (Cl) | mg/kg | 50 | ND |
| Bromine (Br) | mg/kg | 50 | ND |
| Iodine (I) | mg/kg | 50 | ND |

Polychlorinated Naphthalenes (PCNs)

Test Method : With reference to US EPA 8081B: 2007, analysis was performed by GC-MS

| <u>Test Item(s)</u> | <u>Unit</u> | <u>MDL</u> | <u>002</u> |
|--|-------------|------------|------------|
| 2-Chlorinated Naphthalene | mg/kg | 5 | ND |
| 1,4-Dichlorinated Naphthalene | mg/kg | 5 | ND |
| 1,5-Dichlorinated Naphthalene | mg/kg | 5 | ND |
| 1,2-Dichlorinated Naphthalene | mg/kg | 5 | ND |
| 1,8-Dichlorinated Naphthalene | mg/kg | 5 | ND |
| 1,2,3-Trichlorinated Naphthalene | mg/kg | 5 | ND |
| 1,2,3,4-Tetrachlorinated Naphthalene | mg/kg | 5 | ND |
| 1,2,3,4,6-Pentachlorinated Naphthalene | mg/kg | 5 | ND |
| Octa-chlorinated Naphthalene | mg/kg | 5 | ND |

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not operate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

Short Chained Chlorinated Paraffin (SCCP)

Test Method : With reference to US EPA 3550C: 2007, analysis was performed by GC-ECD.

| <u>Test Item(s)</u> | <u>Unit</u> | <u>MDL</u> | <u>002</u> |
|---|-------------|------------|------------|
| Short Chained Chlorinated Paraffin (SCCP) | mg/kg | 30 | ND |

Notes :

- (1) Short Chain Chlorinated Paraffin Reference Information: Entry 42 of Regulation (EC) No 552/2009 amending Annex XVII of REACH Regulation (EC) No 1907/2006 (previously restricted under Directive 2002/45/EC):
 Shall not be placed on the market, or used as substances, or as constituents of other substances or in mixtures in concentrations greater than 1% by weight, where the substance or mixture is intended for:
 - metalworking
 - fat liquoring of leather
 Please refer to Regulation (EC) No 552/2009 to get more detail information

Polychlorinated Terphenyls (PCTs)

Test Method : With reference to US EPA 8082A: 2007, analysis was performed by GC-MS

| <u>Test Item(s)</u> | <u>Unit</u> | <u>MDL</u> | <u>002</u> |
|---------------------|-------------|------------|------------|
| Aroclor 5432 | mg/kg | 5 | ND |
| Aroclor 5442 | mg/kg | 5 | ND |

Notes :

- (1) PCTs Reference Information: Entry 1 of Regulation (EC) No 552/2009 amending Annex XVII of REACH Regulation (EC) No 1907/2006 (previously restricted under Directive 89/677/EC)
 Shall not be placed on the market, or used:
 - as substances,
 - In mixtures, including waste oils, or in equipment, in concentrations greater than 50 mg/kg (0,005 % by weight).
 Please refer to Regulation (EC) No 552/2009 to get more detail information

PFOS (Perfluorooctane Sulfonates) and PFOA (Perfluorooctanoic Acid)

Test Method : With reference to US EPA 3550C: 2007, analysis was performed by HPLC-MS.

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

Test Report

No. SHAEC1007136603

Date: 31 May 2010

Page 5 of 11

| <u>Test Item(s)</u> | <u>Unit</u> | <u>MDL</u> | <u>002</u> |
|--|-------------|------------|------------|
| Perfluorooctane Sulfonates (PFOS) and related Acid, Metal Salt and Amide | mg/kg | 10 | ND |
| Perfluorooctyl Acid (PFOA) | mg/kg | 10 | ND |

Notes :

- (1) PFOS Reference Information: Entry 53 of Regulation (EC) No 552/2009 amending Annex XVII of REACH Regulation (EC) No 1907/2006 (previously restricted under Directive 2006/122/EC)
 - (i) May not be placed on the market or used as a substance or constituent of preparations in a concentration equal to or higher than 0.005 % by mass.
 - (ii) May not be placed on the market in semi-finished products or articles, or parts thereof, if the concentration of PFOS is equal to or higher than 0.1 % by mass calculated with reference to the mass of structurally or microstructurally distinct parts that contain PFOS or, for textiles or other coated materials, if the amount of PFOS is equal to or higher than 1µg /m² of the coated material. Please refer to Regulation (EC) No 552/2009 to get more detail information

Polychlorinated Biphenyls (PCBs)

Test Method : With reference to US EPA 8082A: 2007, analysis was performed by GC-MS

| <u>Test Item(s)</u> | <u>CAS_NO</u> | <u>Unit</u> | <u>MDL</u> | <u>002</u> |
|--|---------------|-------------|------------|------------|
| 2.4.4'-Trichlorobiphenyl (PCB 28) | 7012-37-5 | mg/kg | 0.5 | ND |
| 2.2'.5.5'-Tetrachloro-biphenyl (PCB 52) | 35693-99-3 | mg/kg | 0.5 | ND |
| 2.2'.4.5.5'-Pentachloro-biphenyl (PCB 101) | 37680-73-2 | mg/kg | 0.5 | ND |
| 2.3'.4.4'.5'-Pentachlorobiphenyl (PCB 118) | 31508-00-6 | mg/kg | 0.5 | ND |
| 2.2'.3.4.4'.5'-Hexachloro-biphenyl (PCB 138) | 35065-28-2 | mg/kg | 0.5 | ND |
| 2.2'.4.4'.5.5'-Hexachloro-biphenyl (PCB 153) | 35065-27-1 | mg/kg | 0.5 | ND |
| 2.2'.3.4.4'.5.5'-Heptachlorobiphenyl (PCB 180) | 35065-29-3 | mg/kg | 0.5 | ND |

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not operate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

Sample photo:



SGS authenticate the photo on original report only

*** End of Report ***

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

| | | | |
|--|------------------------------|---------------|------------|
| <p>Kostat, Inc. 358-15, Gogange-Dong, Ojung-gu, Buchun-City Kyoung Ki-Do, Korea Tel: 82-32-671-8100 Fax: 82-32-671-0259</p> | M S D S | Issue Date | 2010.03.03 |
| | [Material Safety Data Sheet] | Revision date | 2010.05.03 |
| | Carrier tapes | Valid date | 2012.05.03 |
| | KKB | Page | 1/4 |

1. PRODUCT AND COMPANY IDENTIFICATION

| | |
|-----------------|---|
| Product Name | Carrier tapes |
| Ext. Appearance | Thermoforming Poly Styrene sheet |
| Purpose/Use | May be use to produce molding or extruded particles or as a compound of other industrial products |
| Manufacture | Kostat, Inc., 49, Wonsan-Ri, Hasung-Myun, Gimpo-City, Kyoung Ki-Do, Korea |
| Contact | (Tel) 82-31-988-2350 (Fax) 82-31-988-2354 |

2. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | Common Name | CAS No. | Content (%) |
|-----------------------------|--------------|-----------|-------------|
| High Impact Polystyrene | HIPS | 9003-53-6 | 60~65 |
| Styrene Butadiene Copolymer | SBS | 9003-55-8 | 10~15 |
| Carbon Black | Carbon Black | 1333-86-4 | 20~25 |
| Anti Oxidant | A/O | 6683-19-8 | 0.5~1.0 |

3. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEWS

Sheets have slight or no odor.

Can burn in a fire creating dense toxic smoke. Molten plastic can cause severe thermal burns.

Fumes produced during melt processing may cause eye, skin and respiratory tract irritation.

POTENTIAL HEALTH EFFECTS

Eye Product may cause irritation or injury due to mechanical action.

Skin Pellets not likely to cause skin irritation.

Ingestion Not acutely toxic.

CHRONIC/CARCINOGENICITY

NTP: Not Tested

OSHA: Not Regulated

IARC: Not Listed

4. FIRST AID MEASURES

| | |
|------------|---|
| Eye | Remove contact lenses at once, immediately. Flush eyes well with copious quantities of water or normal saline for at least 15-20 minutes. If irritation persists, seek medical attention. |
| Skin | Seek medical attention if rash or burn occurs. |
| Inhalation | Not likely to be inhaled due to physical form. |
| Ingestion | Not probable. If a large amount is swallowed, seek medical attention. |

MELT PROCESSING

For molten plastic skin contact, cool rapidly flush water and immediately seek medical attention. For skin contact with fume commiserate, immediately each thoroughly with soap and water. If irritation develops seek medical attention.

5. FIRE FIGHTING MEASURES

Approved pressure demand breathing apparatus and protective clothing should be used for all fires. Water spray is the preferred extinguishing medium.

This product will melt but will not be carried on the surface for water.

EXTINGUISHING MEDIA

Water spray and foam, water is the best extinguishing medium.

HAZARDOUS COMBUSTION PRODUCTS

Hazardous combustion products may include intense heat, dense black smoke, carbon monoxide, carbon dioxide, oxides of phosphorus, hydrogen cyanide, hydrocarbon fragments, hydrogen fluoride, carbonyl fluoride and fluorocarbon fragments.

6. ACCIDENTAL RELEASE MEASURES

Sweep or gather up material and place in container for disposal or recovery.[see section 13]

7. HANDING AND STORAGE

| | |
|---------|---|
| Handing | Follow recommendations on label in processing guide. Prevent contact with skin and eyes. Use good industrial hygiene practices. Provide adequate ventilation. |
| Storage | Store in a dry place away from moisture, excessive heat and sources of ignition. |

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

A continuous supply of fresh air to the workplace together with removal of processing fumes through exhaust systems is recommended. Processing fume condensate may be a fire hazard and toxic remove periodically from exhaust hoods, ducts work and other surfaces using appropriate.

PERSONAL PROTECTION

| | |
|------------------------|---|
| Eye/Face Protection | Wear safety glasses or goggles to protect against dust particles. |
| Skin Protection | Wear chemical resistant gloves and protective clothing. |
| Respiratory Protection | Use NIOSH approved respirator as needed to mitigate exposure. |
| Engineering Controls | Work in well ventilated areas. Do not breathe dust. |

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|----------------------------|---------------------------------|
| Physical Form | Solid |
| Color and Appearance | Plastic pellet with slight odor |
| Boiling Point | Not Applicable |
| Specific Gravity (WATER=1) | 1.15 ~ 1.20 |
| Water Solubility | Insoluble |
| PH | Not Applicable |
| Odor threshold | Not established |

10. STABILITY AND REACTIVITY

| | |
|---|---|
| Stability | Stable |
| Incompatibility | Strong oxidizing agents, strong acids, strong bases |
| Hazardous decomposition Products | Not decomposition expected under normal storage conditions. |
| Do not exceed melt temperature recommendations in product literature. | |

11. TOXICOLOGICAL INFORMATION

Not available

12. ECOLOGICAL INFORMATION

Not expected to present any significant ecological problems.

13. DISPOSAL CONSIDERATIONS

| | |
|----------------|---|
| Waste Disposal | Recycling is encouraged. Landfill or incinerate in accordance with federal, state and local requirements. Collected processing fume condensates and incinerator ash should be tested to determine waste classification. |
|----------------|---|

14. TRANSPORT INFORMATION

This product is not regulated as a hazardous material for transport

Sea Free for any transport

Air Free for any transport

15. REGULATORY INFORMATION

Listed below are chemical substances subject to supplier notification requirements.

U.S. Regulations

TSCA Inventory This product complies with the chemical substance inventory requirements of the US EPA TSCA

CERCLA SECTION 103 Not Listed

SARA SECTION 313 Not Listed

STATE REGULATIONS Not Listed

EUROPEAN REGULATIONS Not Assigned

16. OTHER INFORMATION

The information submitted in this MSDS is based on our current knowledge and experience.

Because it is not possible to anticipate all conditions of use additional safety precautions may be required, we make no warranty.

ABBREVIATIONS:

ACGIH American Conference of Governmental industrial Hygienist

DOT Department of transportation

EC European Communities

EPA Environmental Protection Agency

IARC International Agency for Research on Cancer.

NOISH National Institute for Occupational Safety and Health

NTP National Toxicology Program

OSHA Occupational Safety and Health Administration

RTECS Registry of Toxic Effects of Chemical Substances

CAS# Chemical Abstracts Service Number

RCRA Resource Conservation and Recovery Act

MATERIAL SAFETY DATA SHEET

MANUFACTURER INFORMATION

MANUFACTURER : Denki Kagaku Kogyo Kabushiki Kaisya
SECTION IN CHARGE : Electronic Packaging Materials Department
Electronic Materials Business Division
ADDRESS : Nihonbashi Mitsui Tower,1-1,Nihonbashi-Muromachi 2-chome,Chuo-ku,
Tokyo 103-8338,JAPAN
EMERGENCY PHONE No. : 81-3-5290-5383 (voice)
81-3-5290-5306 (fax)

PRODUCT NAME : Denka thermofilm ALS-PRA

COMPOSITION / INFORMATION ON INGREDIENTS

DISTINCTION OF SINGLE PRODUCT OR MIXTURE

: mixture (layered)
INGREDIENT : Polyethyleneterephthalate resin
: Polyolefinic resin
: Polyolefinic resin

HAZARDS IDENTIFICATION

=====

Emergency overview
Odorless translucent film. Can burn in a fire.

POTENTIAL HEALTH EFFECTS AND FIRST AID MEASURES

EYE : In usual handling, this does not go into an eye. When entering, it may damage an eyeball. Wash an eye with pure water and go to doctor.
SKIN : There is usually no skin obstacle by contact. If abnormalities occur, flush the skin with pure water and go to doctor.
Cutting of the skin may be carried out when the skin is strongly rubbed with the edge of a film.
INHALATION : Gas may have occurred by high temperature during heat sealing. When inhaling this gas severely, move to the place of fresh air and gargle simultaneously. When coughing and breath difficulty will occur, go to doctor.

INGESTION : Ingestion does not happen in usual handling. If little, it does not need special action. If abundant, makes vomit.

FIRE FIGHTING MEASURES

Sever the source of combustion like a general fire, and extinguish the fire using a lot of water and a fire-extinguisher.

In case of fire, black smoke and carbon monoxide, etc. may occur by heat decomposition and imperfect combustion of polymer ingredient. Use suitable protection implement for avoiding risks of inhaling those and barring a field of view for injury on fire-extinguishing activity.

ACCIDENTAL RELEASE MEASURES

Sweep or vacuum material and place in a disposal container.

HANDLING AND STORAGE

HANDLING : Although there is no fear such as ignition, combustion, and explosion in normal temperature, it can burn at high temperature.
Since this material is a roll-like film with heavy weight, take caution in fall up to a leg etc.
Cutting of the skin may be carried out when the skin is strongly rubbed with the edge of a film.

STORAGE : Storage in room at normal temperature and avoid to expose by rain, wind, and direct sunshine.

EXPOSURE CONTROLS / PERSONAL PROTECTION

MANAGEMENT CONCENTRATION
: Not applicable

PERMISSION CONCENTRATION
: Not defined

MEASURE AGAINST EQUIPMENT
: Not necessary

PROTECTION : Not necessary at usual handling

PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE : Translucent plastic film

SPECIFIC GRAVITY : 1.05~1.07

MELTING POINT : Since this material is a mixture, it does not exist clearly.

SOLUBILITY IN WATER : Not applicable

STABILITY AND REACTIVITY

FLUSH POINT : No data available
IGNITING POINT : There are not natural ignition nature and ignition nature by the reactivity with water.
INFLAMMABILITY : Yes
OXIDIZING : No
SELF-REACTIVITY : No
VOLATILITY : No
DUST EXPLOSION : Not applicable
STABILITY AND REACTIVITY : Stable and deficient in reactivity

TOXICOLOGICAL INFORMATION

Although there is no knowledge now, the following view is appropriate.

STIMULUS NATURE : Physical stimulus
ACUTE TOXICITY : Inactive physiologically and there is no special acute action to a human body.

ECOLOGICAL INFORMATION

Decomposition nature, accumulation nature, and fish

TOXICITY : Not applicable
OTHERS : Since a film is considered to be stable that it is hard to decompose, it must not be abandoned anywhere to prevent that a sea living thing and birds take in.

DISPOSAL CONSIDERATION

WASTE MANAGEMENT INFORMATION (DISPOSAL)

: Any disposal practice must be in compliance with local, state, and federal laws and regulations (contact local or state environmental agency for specific rules).

TRANSPORT INFORMATION

Ensure shipping and load to prevent collapse and damage.

REGULATORY INFORMATION

OSHA HAZARD COMMUNICATION RULES

: This product contains no substances under this rules.
